


### Overview

#### At A Glance

- This uniquely designed Internet device simply and affordably provides the right features for the future Internet computing model while still supporting mainstream personal productivity applications
- There are two *iPAQ*™ versions. Compaq *iPAQ* has legacy ports (parallel, serial, and PS/2) for existing peripherals, running Windows 2000, 98, or NT4. Compaq *iPAQ* Legacy-Free features Windows 2000 and five USB ports for the new wave of USB peripherals.
- Order *iPAQ* directly from Compaq at [www.compaq.com/iPAQ](http://www.compaq.com/iPAQ). Note: This Web site is available in English only.
- *iPAQ* delivers ease of deployment and support, and usability, by eliminating ISA/PCI slots and focusing on USB with Windows 2000.
- Compaq Intelligent Manageability provides remote cloning, deployment, installation, configuration, and backup/restore; single-click scheduling for all management tasks, and powerful brokering agents to handle requests automatically and communicate status to the management console.
- Innovative Compaq MultiBay technology enables hot-swapping of slimline CD, or SuperDisk LS-120 drives, without the need to reboot. The breakthrough industrial design features a sleek, small footprint, leaving the user more workspace.
- Protected by Compaq Services, including a limited one-year warranty for parts and onsite labor — Certain restrictions and exclusions apply. Consult the Compaq Customer Support Center for details.

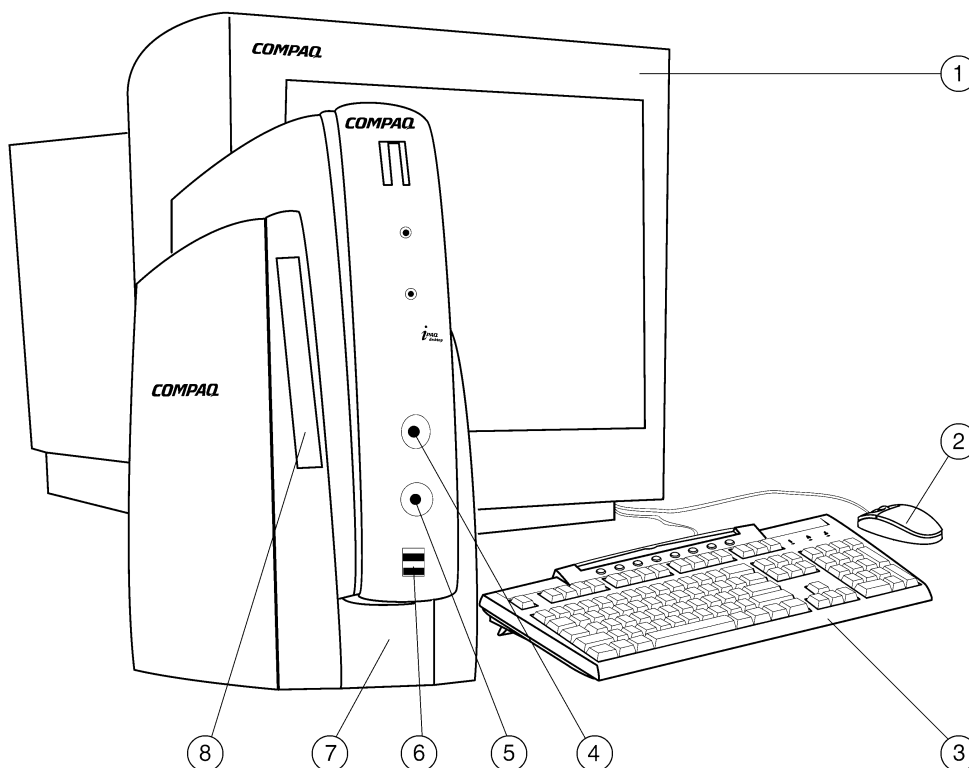

1. Compaq V75 Color Monitor (optional)
2. PS/2 Mouse
3. PS/2 Keyboard
4. Microphone Input

5. Headphone Output
6. 2 USB Ports
7. Speaker
8. MultiBay

## Standard Features

---

### Models

---

#### Legacy-Free models:

*USB/C500/4GB/64MB/W2K*  
*USB/P500/8GB/128MB/W2K*  
*USB/P733/10GB/128MB/W2K*

#### Legacy-Lite models:

*PS2/C500/4GB/64MB/W9x*  
*PS2/C500/8GB/128MB/W9x*  
*PS2/C500/8GB/128MB/NT*  
*PS2/P500/8GB/128MB/W2K*  
*PS2/P500/8GB/128MB/W9x*  
*PS2/P500/8GB/128MB/NT*  
*PS2/P733/10GB/128MB/W2K-NT*  
*PS2/P733/10GB/128MB/W98*

### Standard Features

---

<b>Processor</b>	Intel Celeron™ 500-/66-MHz FSB Intel PIII 500-/100-MHz FSB Intel PIII 733-/133-MHz FSB	
<b>Network Controller</b>	Intel PRO/100+ Management Adapter (embedded)	
<b>Cache Memory</b> <i>One of the following:</i>	256K Advanced Transfer Cache (Pentium III models) 128K Integrated L2 Cache (Intel Celeron models)	
<b>Memory</b> <i>One of the following:</i>	Standard Maximum	128-MB SDRAM 512-MB SDRAM
	Standard Maximum	64-MB SDRAM 512-MB SDRAM
<b>Storage</b> <i>One of the following:</i>	Hard Drives	Smart II Ultra ATA 66 – 10 GB Smart II Ultra ATA 66 – 8.4 GB Smart II Ultra ATA 66 – 4.3 GB
<b>Interfaces</b>	USB VGA Parallel Serial PS/2 Keyboard PS/2 Mouse RJ-45 (LAN) Microphone Headphone Line-in Line-out	2 ( <i>iPAQ</i> standard), 5 ( <i>iPAQ</i> Legacy-Free) 1 1 ( <i>iPAQ</i> standard model only) 1 ( <i>iPAQ</i> standard model only) 1 ( <i>iPAQ</i> standard model only) 1 ( <i>iPAQ</i> standard model only) 1 1 1 1 1
<b>Audio</b>	AC97 with 16-bit Full-Duplex audio (embedded)	
<b>Graphics</b>	Intel 3D Graphics (embedded) Pentium III models include 4-MB video cache	
<b>Security</b>	Easily-installed metal bracket to prevent theft of memory modules or internal hard drive	
<b>Intelligent Manageability</b>	Tracking and security Fault notification and recovery Remote ROM flash Software deployment tools Wake-on-LAN support	
<b>Operating System</b> <i>One of the following:</i>	Microsoft® Windows® 98 ( <i>iPAQ</i> standard only) Microsoft Windows NT4 (SP4) ( <i>iPAQ</i> standard only) Microsoft Windows 2000 ( <i>iPAQ</i> standard and <i>iPAQ</i> Legacy-Free)	
<b>Service and Support</b>	One-year parts and on-site labor standard	

---

### Options

<b>Memory</b>	256-MB SDRAM	102306-B21
	128-MB SDRAM	166614-B21
	64-MB SDRAM	166613-B21
	32-MB SDRAM	166612-B21
<b>Monitors</b>	S510 Carbon Monitor	168636-xxx
	S710 Carbon Monitor	154499-xxx
	TFT5004 15-inch Carbon Flat Panel Monitor	202416-xxx
<b>Hard Drive</b>	MultiBay 6-GB Hard Drive	165861-B21
<b>Multimedia</b>	MultiBay 24X CD-ROM Drive	165864-B21
	MultiBay 8X DVD-ROM Drive	202994-B21
	MultiBay 4/4/20X CD-RW Drive	201808-B21
<b>Communications</b>	USB 56K V.90USB Modem (external)	322050-001
<b>Removable Storage</b>	MultiBay 2X SuperDisk LS-120 Drive	165866-B21
<b>Security Devices</b>	Compaq Security Lock	294316-B21

### Memory

---

#### Compaq *iPAQ* Desktop 64 MB

##### STANDARD MEMORY

64 MB SDRAM standard

Memory		Slot 1	Slot 2
Standard	64 MB	64 MB	Empty

##### STANDARD MEMORY

##### PLUS OPTIONAL MEMORY

Support for up to 320 MB of SDRAM memory is available with the installation of optional Memory Kits.

Memory		Slot 1	Slot 2
Standard	64 MB	64 MB	Empty
	96 MB	64 MB	32 MB
	128 MB	64 MB	64 MB
	192 MB	64 MB	128 MB
	320 MB	64 MB	256 MB

##### STANDARD MEMORY REPLACED

##### WITH OPTIONAL MEMORY

Support for up to 512 MB of SDRAM memory is available with the removal of the standard 64-MB SDRAM module and the installation of optional Memory Upgrades.

Memory		Slot 1	Slot 2
Standard	64 MB	64 MB	Empty
	512 MB	256 MB	256 MB

Following are memory options available from Compaq:

- 32-MB SDRAM Memory Upgrade 166612-B21
- 64-MB SDRAM Memory Upgrade 166613-B21
- 128-MB SDRAM Memory Upgrade 166614-B21
- 256-MB SDRAM Memory Upgrade 102306-B21

## Memory

### Compaq *iPAQ* Desktop 128 MB

#### STANDARD MEMORY

128 MB SDRAM standard

Memory		Slot 1	Slot 2
Standard	128 MB	128 MB	Empty

#### STANDARD MEMORY

#### PLUS OPTIONAL MEMORY

Support for up to 384 MB of SDRAM memory is available with the installation of optional Memory Upgrades.

Memory		Slot 1	Slot 2
Standard	128 MB	128 MB	Empty
	160 MB	128 MB	32 MB
	192 MB	128 MB	64 MB
	256 MB	128 MB	128 MB
	384 MB	128 MB	256 MB

#### STANDARD MEMORY REPLACED

#### WITH OPTIONAL MEMORY

Support for up to 512 MB of SDRAM memory is available with the removal of the standard 128-MB SDRAM module and the installation of optional Memory Upgrades.

Memory		Slot 1	Slot 2
Standard	128 MB	128 MB	Empty
	512 MB	256 MB	256 MB

Following are memory options available from Compaq:

- 32-MB SDRAM Memory Upgrade 166612-B21
- 64-MB SDRAM Memory Upgrade 166613-B21
- 128-MB SDRAM Memory Upgrade 166614-B21
- 256-MB SDRAM Memory Upgrade 102306-B21

## Storage

### COMPAQ *iPAQ* DESKTOP DRIVE SUPPORT

	Quantity Supported	Position Supported	Controller
<b>Removable Media</b>			
MultiBay SuperDisk (LS-120) 2X High-Capacity Floppy Drive	1	MultiBay	IDE
MultiBay 24X Max CD-ROM Drive	1	MultiBay	IDE
MultiBay 4/4/20X CD-RW Drive	1	MultiBay	IDE
MultiBay 8X DVD-ROM Drive	1	MultiBay	IDE
<b>Hard Drives</b>			
10-GB 5400 rpm SMART III Ultra ATA Hard Drive	1	Internal Hard Drive	Ultra ATA 66 (embedded)
8.4-GB 5400 rpm SMART III Ultra ATA Hard Drive	1	Internal Hard Drive	Ultra ATA 66 (embedded)
4.3-GB 5400 rpm SMART III Ultra ATA Hard Drive	1	Internal Hard Drive	Ultra ATA 66 (embedded)
MultiBay 6-GB Hard Drive	1	MultiBay	IDE

### Technical Specifications

---

System Unit	Dimensions (WxDxH)	6.4 x 10.5 x 14.6 in/16.25 x 26.67 x 37.08 cm
	Weight	10.65 lbs/4.83 kg (without MultiBay device, keyboard, and mouse)

---

#### Compaq PCs use genuine Microsoft® Windows®

[www.Microsoft.com/piracy/howtotell](http://www.Microsoft.com/piracy/howtotell)

©2001 Compaq Canada Corporation. All rights reserved. Compaq is a trademark of Compaq Computer Corporation. Microsoft and Windows are trademarks of Microsoft Corporation in the U.S. and other countries. The information in this publication is subject to change without notice. Printed in Canada.